



This model is based on IEC 320-C14 related specifications from the following resources.

Main Resource: http://www.qualtekusa.com/images/AC_Receptacles/pdfs/703w0004.pdf

Other:

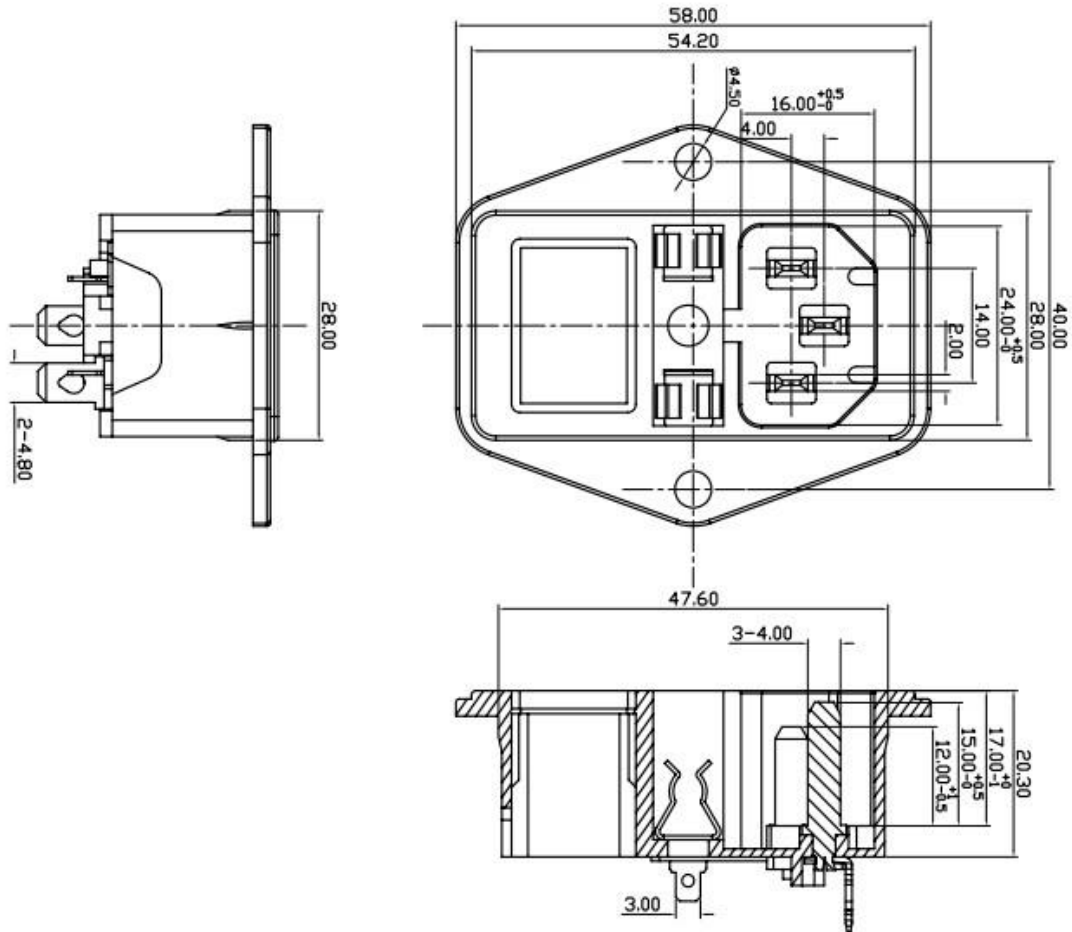


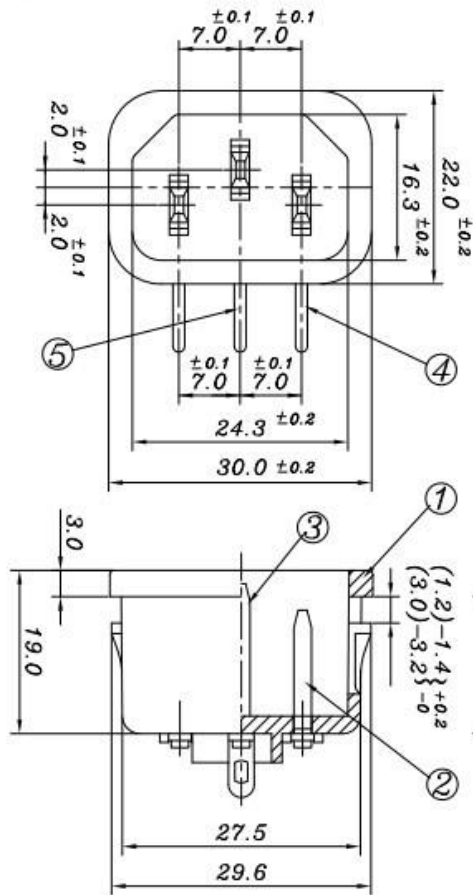

MOUNTING HOLE

PANEL THICK : 1.2mm

PANEL THICK : 3.0mm




A=2.4 ±0.25

B=3.4 ±0.25

C=5.2 ±0.25

D=6.2 ±0.25

E=9.8 ±0.25

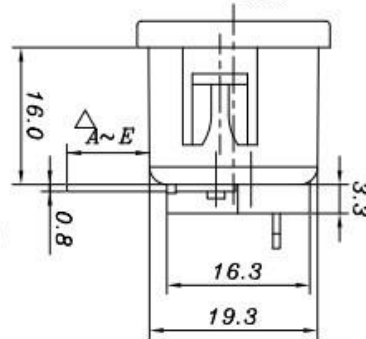

規格 SPECIFICATIONS

- 額定
1.RATING : 10A 250VAC
15A 250VAC
- 耐電壓
2.WITHSTAND VOLTAGE : AC 2000V 1Min
- 絶縁電阻
3.INSULATION RESISTANCE : MORE THAN 100M
(at DC 500V)
- 操作温度
4.OPERATING TEMPERATURE : -25° C TO +85° C (MAX)

認可安規
5.SAFETY

